


- High stability
- Compact and light weight

■ SPECIFICATIONS

Operating Temperature Range	-20 ~ +55°C	
Rated Voltage	330VV.DC	360VV.DC
Voltage Proof	350SV.DC	390SV.DC
Capacitance Tolerance	-10% ~ ± 20% (at 20°C,120Hz)	
Dissipation Factor (at 20°C ,120Hz)	Capacitance:150 ~ 600 uF	Less than 0.1
	:601 ~ 1500 uF	Less than 0.15
Leakage Current	I = 1xC (20°C , 5 minutes) I: Leakage Current(uA) V: Rated Capacitance(uF)	

■ DIMENSIONS

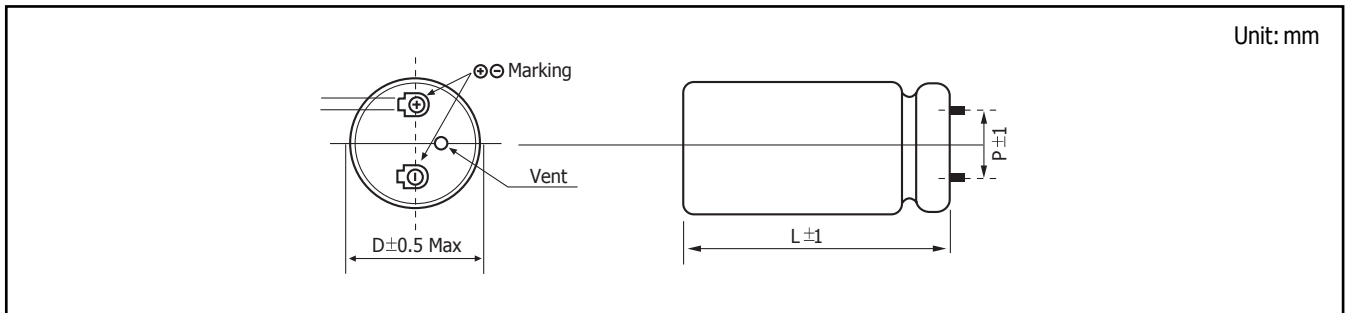

■ STANDARD RATINGS

Capacitance (uF)	øD(mm)	14.0	14.5	15.5	16.0	18.0	20.0	22.0	25.0	30.0	35.0
	p	5.5	5.5	6.0	6.0	7.0	7.0	8.0	9.0	12.0	14.0
150	L(mm)	29.5	28.5	25.5							
180		35.5	33.0	29.5	27.5						
200		37.5	35.5	31.5	29.5						
250		45.5	42.0	35.5	35.5	28.5					
300		53.5	50.5	44.5	42.0	33.0	28.0				
350			61.0	50.5	47.5	37.5	30.5				
400				56.0	53.5	42.0	34.0	30.0			
450						47.5	38.0	33.0			
500						52.0	40.0	36.0	30.0		
600						61.0	48.0	41.0	34.0		
700							54.0	47.0	38.0	30.0	
800							61.0	52.0	43.0	34.0	
900								61.0	48.0	36.0	
1000									56.0	40.0	32.0
1200									63.0	48.0	38.0
1300									70.0	52.0	40.0
1500									57.0	46.0	

■ STANDARD RATINGS 360WV.DC(390SV.DC)

Capacitance (uF)	øD(mm) p	14.0	14.5	15.5	16.0	18..0	20.0	22.0	25.0	30.0	35.0
150	L(mm)	37.5	37.5	31.5	29.5						
180		44.5	42.0	35.5	33.0	27.5					
200		47.5	44.5	39.5	37.5	31.5	26.0				
250		56.0	52.0	47.5	44.5	37.5	30.0	27.0			
300				56.0	52.0	42.0	34.0	31.0	27.0		
350					56.0	47.5	38.0	35.0	29.0		
400						52.0	43.0	37.0	33.0		
450						61.0	45.0	41.0	35.0		
500							52.0	46.0	39.0	31.0	
600							57.0	52.0	44.0	33.0	
700								62.0	53.0	37.0	
800									62.0	44.0	35.0
900									73.0	49.0	38.0
1000										53.0	46.0
1200										62.0	50.0
1300										69.0	54.0
1500										60.0	